

PATENTED

SCRAIL®
ROOFLOC®



SCRAIL® ROOFLOC®

- 2 times faster than collated screws, 8 times faster than bulk screws
- Different colours are available upon request
- Collated plastic sheet SCRAIL® strips eliminate fastener waste
- FasCoat® good for exterior applications
- Leak-proof EPDM washer
- Guaranteed non-cutting fastening

HOLDING POWER & CORROSION PROTECTION

- Patented thread provides excellent holding power of 2,500 Newton (560 lbs) and more
- The UV-resistant EPDM sealing washer protects the underlying wood from moisture penetration



CONTACT & SERVICE

Our sales team
is available at:

P +43 7724 2111-671
sales@beck-fastening.com
www.beck-fastening.com

DESCRIPTION

The **SCRAIL® ROOFLOC®** system was developed by BECK for the quick and efficient installation of trapezoidal sheet metal roofs and façades. The resulting increase in performance is around 100 % and more. The **SCRAIL® ROOFLOC®** is pneumatically driven with the **SCRAIL® ROOFLOC®** installation tool by **FASCO®** and can be completely unscrewed for repair work.

APPLICATION

- For attaching metal roof to wood
- For attaching metal siding to wood

MATERIAL

- Standard steel
- Stainless steel SS304/A2

FINISH


- FasCoat®

FASTENER

	SCRAIL® ROOFLOC®
Diameter	3,80 4,20 mm 0.148 0.165"
Length	37 63 75 mm 1 ½ 2 ½ 3"
Head	10 mm 0.400"
Drive Type	HEX 6,35 mm 1/4"
Thread Type	patented STEELTHREAD
Collation	0° plastic sheet strip
Quantity	30 per strip

COMPATIBLE FASCO® TOOLS

- F58AC ROOFLOC-75

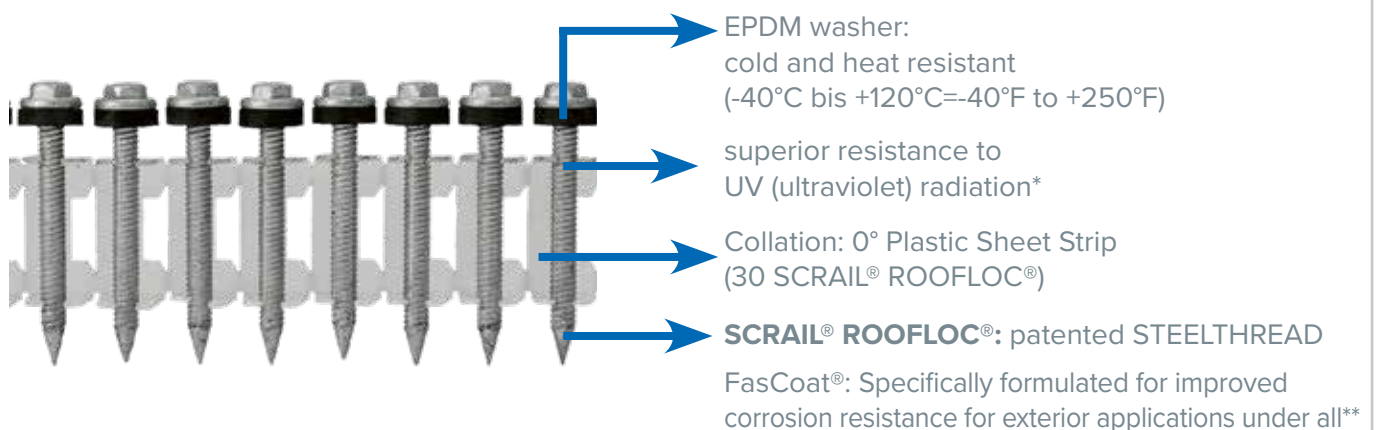

* According to EPDM roofing Association and VHT test report PB-833_5-16-Beck-170329 vom 29. März 2017.

** but extreme salinity and humidity conditions